

LED Bollards

Installation instructions for LED Bollards

Warnings and cautions


- To avoid electric shock, serious injury or property damage, isolate power before installing, removing or servicing the product.
- It is recommended that luminaires are installed by a qualified electrician and the installation complies with the local current wiring regulations.
- Any broken or damaged parts should be replaced as soon as possible. JCC will not accept responsibility for claims arising from sub-standard installations.
- These products are designed for connection to a mains supply of 220-240V~ 50/60Hz.
- This luminaire is suitable for outdoor use only.
- It may be necessary to upgrade your MCBs to allow for increased inrush current.
- Ensure fixing surface is flat and even.
- Do not install in areas that are near to continual running water
- It is the installers responsibility to ensure that the correct supply cable is used for this product, where a rubber grommet is supplied a H05RN-F cable should be used.

INSTALLATION

ENGLISH



Input Connections: 220-240V~ 50/60Hz Class I 

Fig. 1.

Black = Lp (Permanent Live)EM only
Brown = Ls(Switched Live)
Blue = Neutral
Green/Yellow = Earth 

1.


Use the HEX key supplied and remove the head and base plate

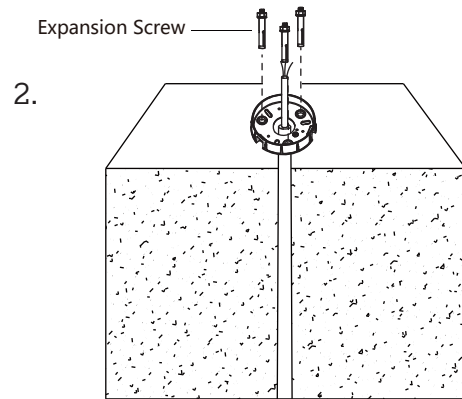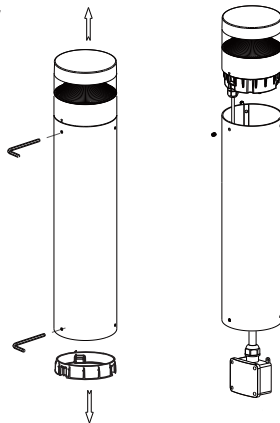

2.


Use the base plate as a template to mark drill points and fix base plate with anchor bolts supplied

3.

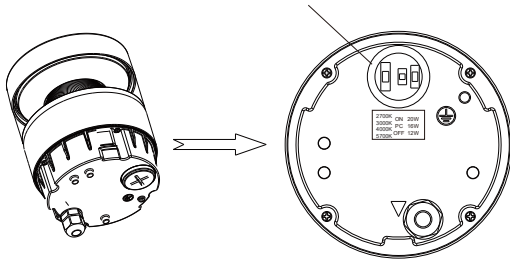


Remove IP blanking plate on the base of the head to access CCT and Wattage switches to select preferred CCT and Wattage

4.




Refit the head to the bollard body, making sure that the "V" notches are aligned and secure with the HEX screws

5.

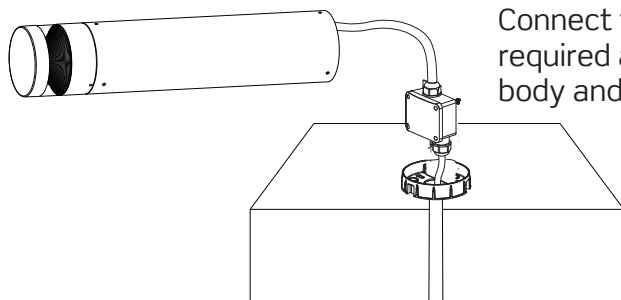

Connect the mains supply as required as per fig.1. and refit bollard body and head to the base plate

6.








Secure the body to the base plate with the HEX screws, turn on mains supply and test for correct operation

You can help protect the environment. Please remember to respect the local regulations: hand in the non-working electrical equipment to an appropriate waste disposal centre. The packaging material is recyclable. Dispose of the packaging in an environmentally friendly manner and make it available for the recyclable material collection service.

Profile & Dimensions

All dimensions in millimetres

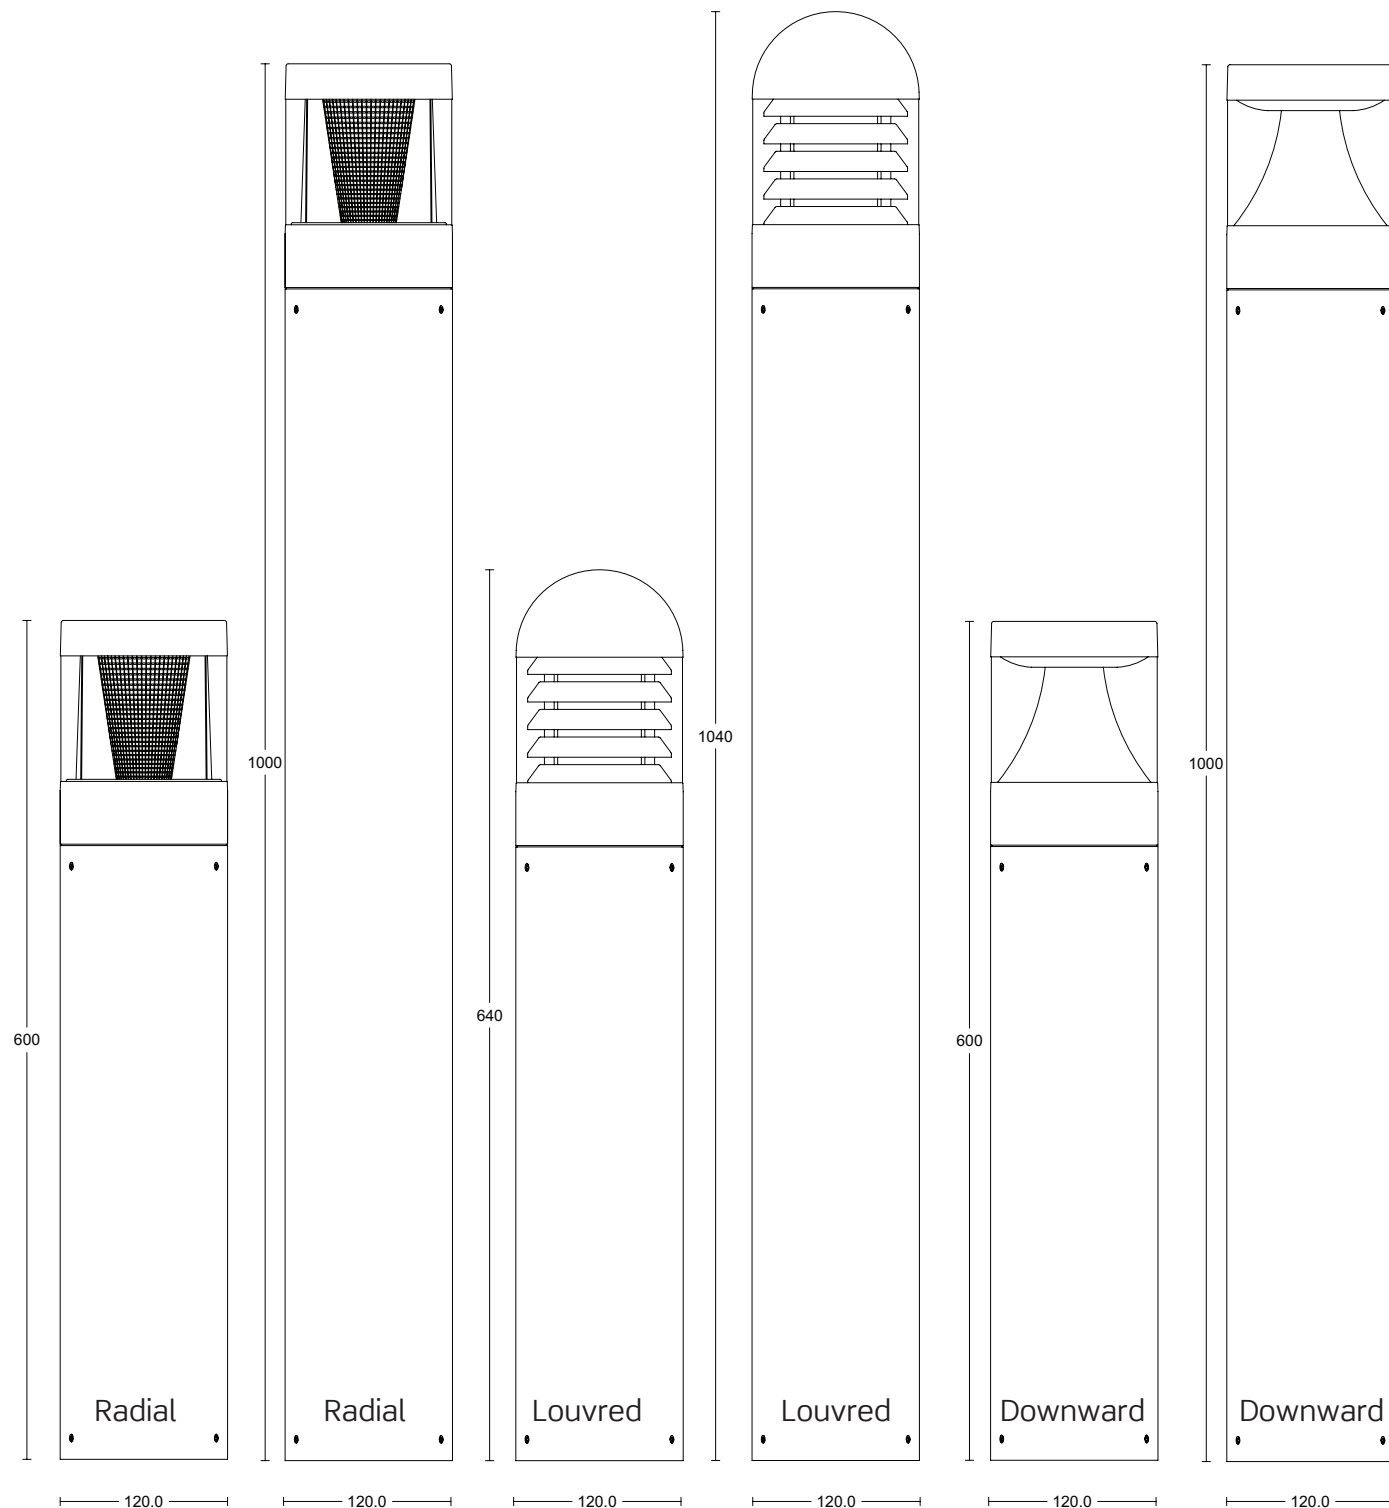

Important warranty information

This product is supported by a 2-year standard warranty which will extend to 5-years if registered within the first year of purchase. Please register at jcc.co.uk/warranty (Terms and conditions apply).

The installer will be asked to provide the following information, which is detailed on a label attached to the luminaire's chassis:
Product Code/Date Code.

BS EN ISO9001 - 2015 - Registered Firm Certificate No. GB 1552

JCC Lighting Products Ltd. Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT

Technical Support: +44(0)1243 838986 Customer Services: +44(0)1243 838999