

LED Wall Lights

Installation instructions for LED Wall Lights

Warnings and cautions

- To avoid electric shock, serious injury or property damage, isolate power before installing, removing or servicing the product.
- It is recommended that luminaires are installed by a qualified electrician and the installation complies with the local current wiring regulations.
- Any broken or damaged parts should be replaced as soon as possible. JCC will not accept responsibility for claims arising from sub-standard installations.
- These products are designed for connection to a mains supply of 220-240V~ 50/60Hz.
- This luminaire is suitable for outdoor use.
- It may be necessary to upgrade your MCBs to allow for increased inrush current.
- Ensure fixing surface is flat and even.
- Do not install in areas that are near to continual running water
- It is the installers responsibility to ensure that the correct supply cable is used for this product, where a rubber grommet is supplied a H05RN-F cable should be used.

INSTALLATION

ENGLISH

Input Connections: 220-240V~ 50/60Hz Class I 

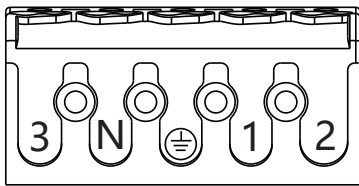



Fig. 1.



1 = Lp (Permanent Live)EM only

2 = Ls(Switched Live)

N = Neutral


 = Earth

3.

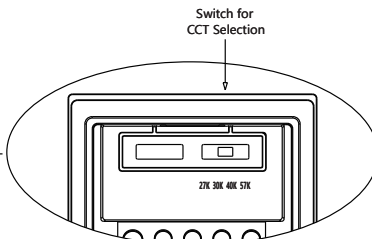


Select the preferred CCT using the switch inside the housing

5.

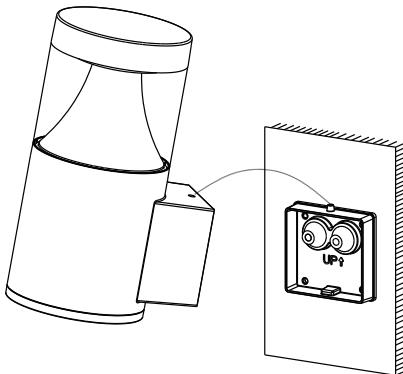


Fit the main body onto the mounting plate using the locating pin on the plate and corresponding hole in the body

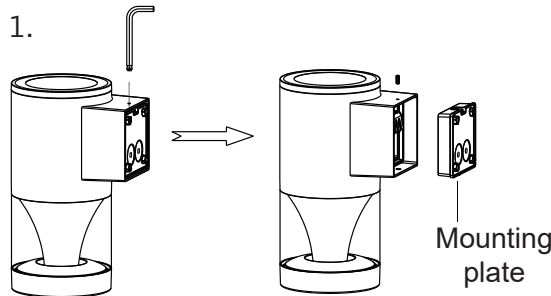


Place the fitting upside down to access the grub screw to release the mounting plate

2.




Secure the mounting plate ensuring that the plate is in the correct orientation

4.

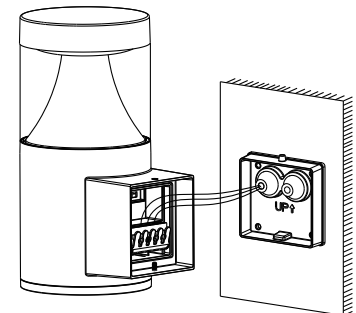

Connect mains input as indicated in Fig. 1.




6.

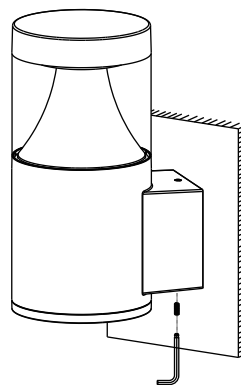




Refit the grub screw to secure in place, then test to ensure correct operation

You can help protect the environment. Please remember to respect the local regulations: hand in the non-working electrical equipment to an appropriate waste disposal centre. The packaging material is recyclable. Dispose of the packaging in an environmentally friendly manner and make it available for the recyclable material collection service.




Profile & Dimensions

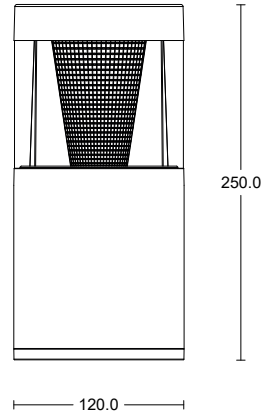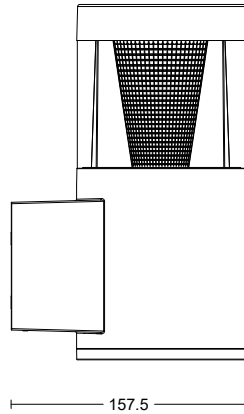

JC039030- Radial

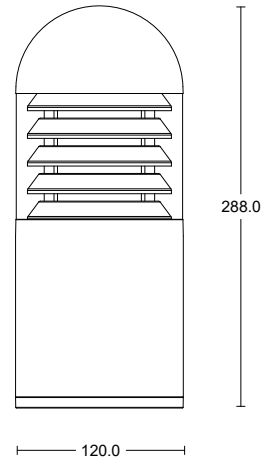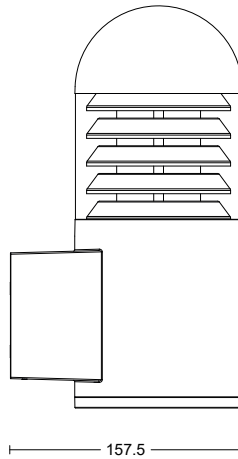



JC039031- Louvred

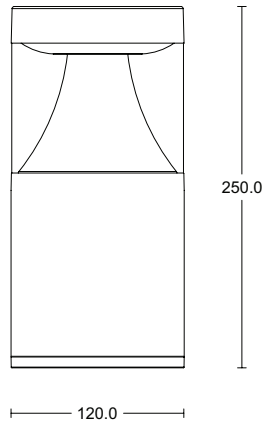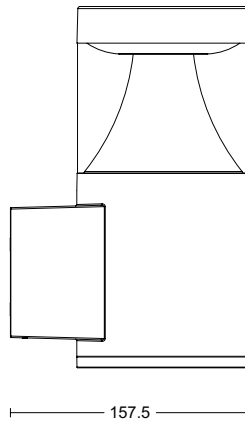

JC039032- Downward

All dimensions in millimetres



General Maintenance Requirements

JCC Lighting Products would recommend that the following maintenance is performed in order to prolong the life of this product: During installation, and then bi-annually, grease or lubricate removable fixings, thus ensuring future maintenance is trouble free. Clean Luminaire with warm water to remove any surface deposits. **Note: Do Not Use abrasive cleaning products .**

Important warranty information

This product is supported by a 2-year standard warranty which will extend to 5-years if registered within the first year of purchase. Please register at jcc.co.uk/warranty (Terms and conditions apply).

The installer will be asked to provide the following information, which is detailed on a label attached to the luminaire's chassis:
Product Code/Date Code.

BS EN ISO9001 - 2015 - Registered Firm Certificate No. GB 1552
JCC Lighting Products Ltd. Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT
Technical Support: +44(0)1243 838986 Customer Services: +44(0)1243 838999