

# Toughbay™ Range

Installation instructions for LED Highbay



## WARNINGS AND CAUTIONS

- It is recommended that luminaires are installed by a qualified electrician to ensure the installation complies with the local current wiring regulations.
- Any broken or damaged parts should be replaced as soon as possible. JCC will not accept responsibility for claims arising from sub-standard installations.
- Caution.** Risk of electric shock ⚠️
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged the luminaire shall be destroyed.
- These products are designed for connection to a 220-240V~ 50/60Hz supply.
- This luminaire is suitable for indoor and outdoor use.
- It may be necessary to upgrade your MCBs to allow for increased inrush current.
- This luminaire should be installed out of arms reach.
- Terminal block not included. Installation may require advice from a qualified person.
- The ambient room temperature should not exceed 40°C.

## INSTALLATION

ENGLISH

Specifications Colour Temp: 4000K\*/5700K Ra: 84

Wattage	Lumens	LpcW	Beam
100W	14500	145	60°/90°/120°
150W*	21500	143	60°/90°/120°
150W	21750	145	60°/90°/120°
200W	30000	150	60°/90°/120°


Available finishes: Black only

Terminal block must comply to EN 60998-2-1 or EN 60998-2-2

### Standard version connection

220-240V~ 50/60Hz / Class I ⚡


Figure 1. Mains input



### Emergency version connection


220-240V 50/60Hz / Class I ⚡

Figure 2.

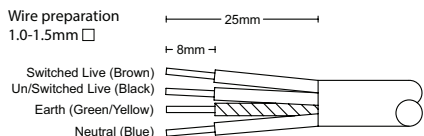

### 1-10V Dimming control input

Figure 3.

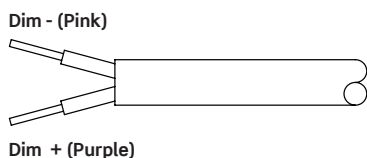



**Accessories** \*not suitable for EM and MW versions

JC040124 -Toughbay™100W Surface Mounting Bracket  
JC040149 -Toughbay™150W Surface Mounting Bracket  
JC040174 -Toughbay™200W Surface Mounting Bracket

- Read instructions and check that you have all of the tools and accessories required to complete the installation correctly. Isolate power supply before starting the installation.
- ### Standard dimmable version installation procedure
- The luminaire comes with a fixed eye(s) for suspension as standard.
  - For surface mounting please order correct bracket separately (see below for details). Fit the bracket to a flat surface ensuring that fixings are suitable to hold the weight of the luminaire. Fit the luminaire to the bracket using the bolts supplied with the bracket.
  - Connect the mains input as shown in Fig.1, using a suitable connector to maintain the IP rating for the location.(not supplied). Please ensure that 3-core H07 RN-F cable is used.
  - This luminaire is 1-10V dimmable as standard, if you wish to dim this fitting ensure that you connect the 1-10V dimming control wires as shown in Fig.3 to a 1-10V dimming system only. If no dimming is required please leave the terminals isolated.

### Emergency dimmable version installation procedure

- Follow steps 1-2 of the standard installation procedure.
- Connect the mains input as shown in Fig.2, using the connector (supplied). Please ensure that 4-core H07 RN-F cable is used. To identify the correct terminals for mains input, unscrew/loosen the collar to expose the cables and match the connections to the corresponding colours in Fig.2
- Once the mains supply is connected and the fitting is installed, connect batteries. The LED charge indicator will illuminate showing the fitting is in charge mode and is working correctly. Allow 24hrs for the batteries to charge prior to testing in emergency mode.
- This luminaire is 1-10V dimmable as standard, if you wish to dim this fitting ensure that you connect the 1-10V dimming control wires as shown in Fig.3 to a 1-10V dimming system only. If no dimming is required please leave the terminals isolated.



UK  
CA



RoHS  
Compliant



IP65

jcc.co.uk

You can help protect the environment. Please remember to respect the local regulations: hand in the non-working electrical equipment to an appropriate waste disposal centre. The packaging material is recyclable. Dispose of the packaging in an environmentally friendly manner and make it available for the recyclable material collection service.

### Important warranty information

This product is supported by a 2-year standard warranty which will extend to 5-years if registered within the first year of purchase. (inc 1 year on site)  
Please register at [jcc.co.uk/warranty](http://jcc.co.uk/warranty) (Terms and conditions apply).

The installer will be asked to provide the following information, which is detailed on a label attached to the luminaire's chassis: Product Code/Date Code.

BS EN ISO9001 - 2015 - Registered Firm Certificate No. GB 1552

JCC Lighting Products Ltd. Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT

Technical Support: +44(0)1243 838986 Customer Services: +44(0)1243 838999

V4\_Feb\_2023\_RS

# Profile & Dimensions All dimensions in millimetres

100W

150W

200W

1-10V Dim


M/W Dim

1-10V Dim

M/W Dim

1-10V Dim

M/W Dim

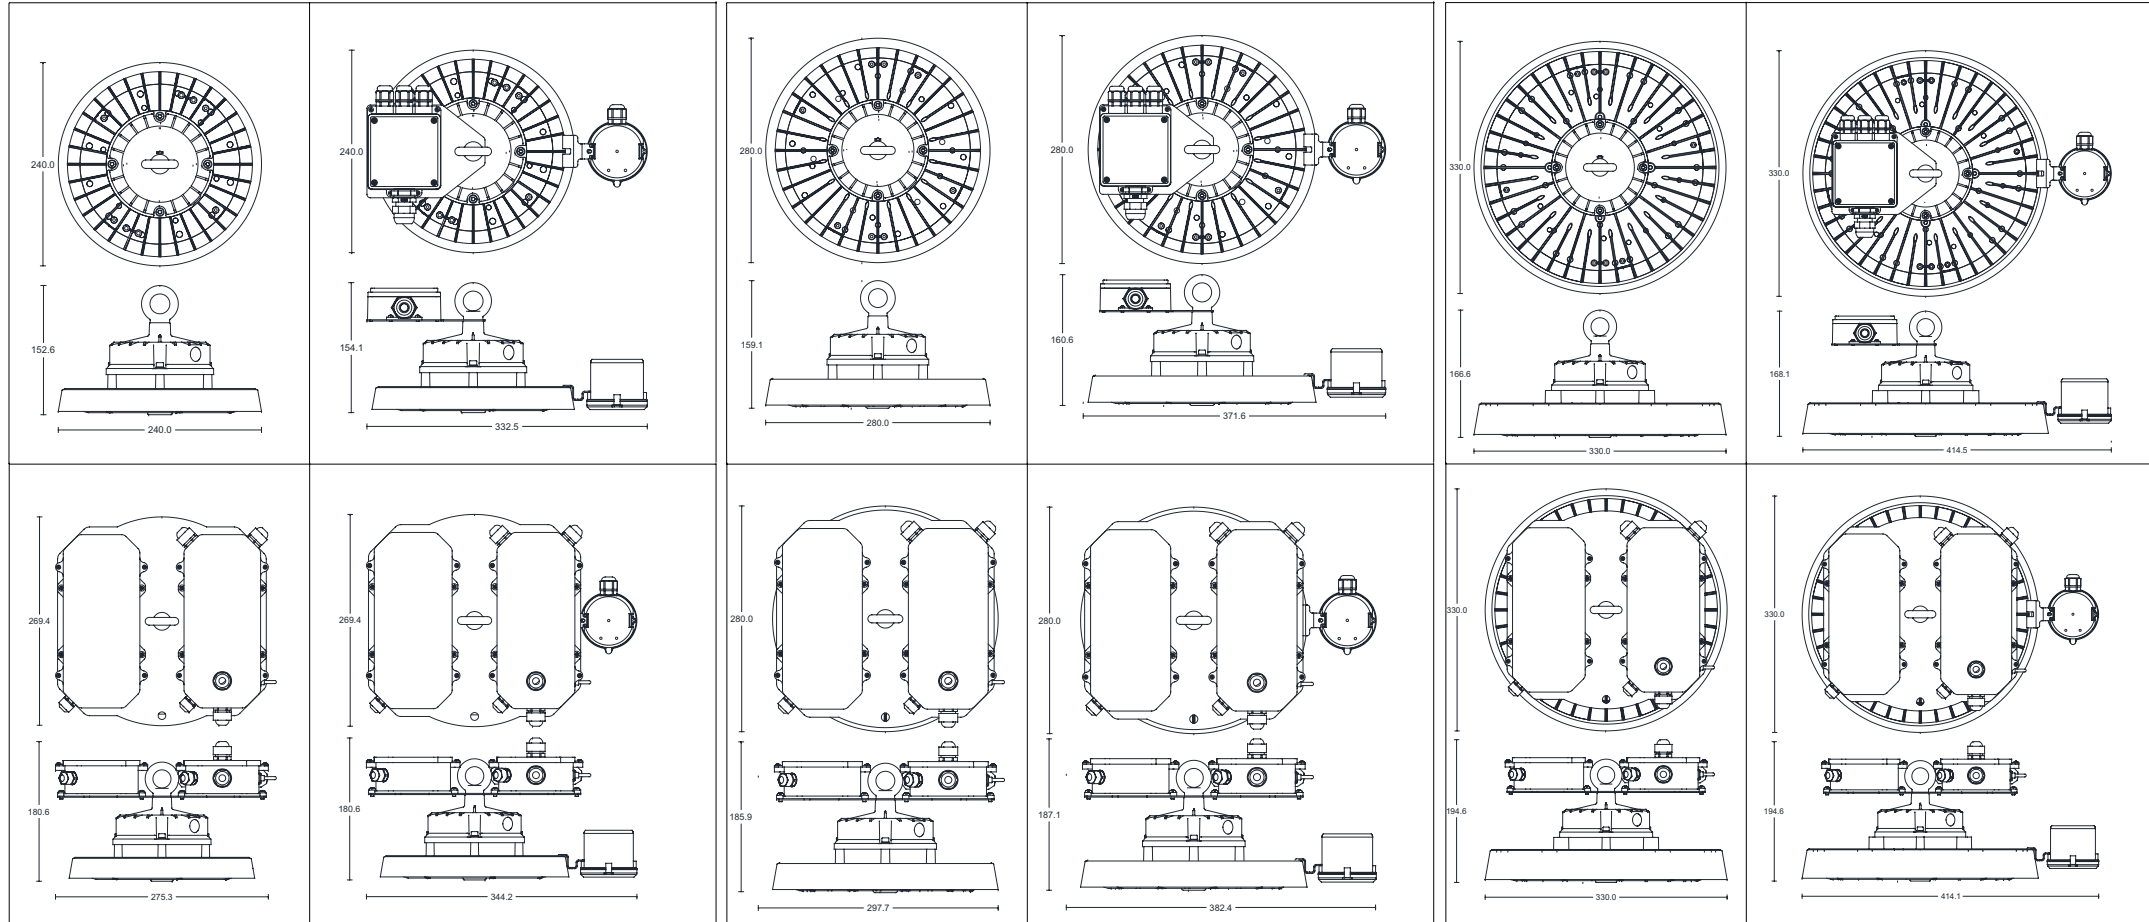

1-10V dim EM

M/W Dim EM

1-10V dim EM

M/W Dim EM

1-10V dim EM

M/W Dim EM

