



READ THESE INSTRUCTIONS THOROUGHLY BEFORE INSTALLATION KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE.

IMPORTANT:
This product must be installed by a qualified electrician or competent person, and in accordance with current building and IET wiring regulations.

BOX CONTENTS

This lighting fixture has been properly packed to avoid damage during transit. Before commencing with the installation carefully inspect the luminaire to confirm there is no damage. **DO NOT INSTALL** if any damage has occurred to the fixture or any of its components.

- Light Fitting
- Instruction Manual
- Cable Gland

TOOLS REQUIRED

- Screwdriver
- Cable

INSTALLATION INSTRUCTIONS

1 One turn

2

3

Electrical connection wiring

- NEUTRAL = Blue
- EARTH = Green/Yellow
- LIVE (L) = Brown

For emergency wiring, see overleaf.

4

5 Do not over tighten.

6

PLEASE READ THESE INSTRUCTIONS BEFORE INSTALLATION.



WARNING: Risk of electric shock! Isolate the mains power before proceeding.

- Turn off the mains power before performing inspections, installation, or removal
- Verify that the supply voltage is correct by comparing it with the luminaire label information
- It is the installers responsibility to ensure installation is suitable for the total load of the luminaire(s). The supply cable, fuses/circuit breakers must be correctly rated for the electrical load and considering for any transient inrush currents that may occur
- Do not perform insulation strength or resistance tests on installed luminaire(s) connected

1. Loosen the three end cover screws through 1 turn only, **DO NOT LOOSEN** any further. **(1)**
2. The end cover can now be removed as shown and the gear tray drawn out to gain access to the terminal connector. **(2)**
3. Loosen the cable gland and thread the cable (not supplied) through the gland. Outer cable sheath must pass through the cable gland. Connect the 3-core cable as shown for standard and step dim units or 4-core cable for emergency units (see overleaf). **(3)**
4. With the cable connected slide the gear tray back into the unit, then replace the end cover, making sure the two guides align with the gear tray base. **(4)**
5. With the end cover firmly in position, re-tighten the three end cover screws to secure - **DO NOT OVER TIGHTEN**. Tighten cable gland to secure cable. **(5)**
6. Switch on the mains power and check the operation of the luminaire.

DISPOSAL

Disassembly instructions for end of life disposal available on website.

Disposal of Electronic Equipment WEEE Directive 2002/96/EC This product falls within the scope of the Waste Electrical & Electronic Equipment Directive (WEEE), which means the product should not be disposed of as normal household waste. Please recycle where facilities exist or check with your Local Authority. RoHS - All components and materials used in this product are RoHS 2002/95/EC compliant.

Specifications may change from time to time. The information contained in this leaflet is for guidance only and should not be considered as always accurate and should be treated as not representative.

WARRANTY

This luminaire is warranted for a period of 5 years from the date of purchase.** The backup battery pack in the emergency version is warranted for a period of 12 months. The warranty could be invalidated should the light fitting not be installed according to these instructions, outside the scope of the specification or the product has been altered or tampered with in any way. Please see website for terms and conditions.

PRODUCT TEMP SPECIFICATION

Standard -20° to +45°C
Emergency 0° to +30°C

Revision 2.0 - May 2022

MICROWAVE SENSOR SETTINGS

Daylight:

This setting turns the light off should there be sufficient daylight.

Hold Time:

This determines the time the fitting remains at 100% illumination following motion detection.

Detection Area:


This determines the effective range of the motion. Note that reducing the sensitivity will also narrow the detection area.

STANDARD ON/OFF MICROWAVE SENSOR

	DAYLIGHT				HOLD TIME				DETECTION AREA				
	1	2	3		4	5	6		7	8			
I	ON	ON	ON	2Lux	I	ON	ON	ON	5S	I	ON	ON	100%
II	-	ON	ON	10Lux	II	ON	ON	-	30S	II	ON	-	75%
III	-	ON	-	30Lux	III	ON	-	ON	90S	III	-	ON	50%
IV	-	-	ON	50Lux	IV	ON	-	-	5Min	IV	-	-	25%
V	-	-	-	Disable	V	-	ON	ON	20Min				
					VI	-	-	-	30Min				

WELFORD TUBULAIRE DIMENSIONS

Part No.	Description	Watts	L (mm)	W (mm)	H (mm)	Weight
420542	Welford Tubulaire 5ft	65W	1485	74	74	1.4Kg



Installation Engineers Contact Details:		Luminaire Reference / Location
Name:	Tel:	

Luminaire Details:	Full Recharge Duration 24 Hours	Emergency Duration 3 Hours	Lamp Type LED
--------------------	--	-----------------------------------	----------------------

ROUTINE TEST RECORD


Type Test	Year 1		Year 2		Year 3		Year 4		Year 5	
	Signed	Date	Signed	Date	Signed	Date	Signed	Date	Signed	Date
Functional 1										
Functional 2										
Functional 3										
Functional 4										
Functional 5										
Functional 6										
Functional 7										
Functional 8										
Functional 9										
Functional 10										
Functional 11										
3hr Duration 12										

Wiring instructions for units equipped an with EMERGENCY function

Emergency lighting luminaries must be installed and maintained in accordance with the emergency lighting standard BS 5266-1

1. Connect incoming earth cable to 'Earth' terminal on connector block.
 2. Connect incoming neutral cable to 'Neutral' terminal on connector block.
 3. For the emergency unit to work correctly, please ensure that an uninterrupted permanent live feed is present and is connected directly to the 'Permanent Live' terminal of the mains terminal block. Please ensure there are no switches, PIRs etc within the permanent live feed, constant switching of the emergency pack could result in premature battery failure.
 4. Connect incoming switched live cable to the terminal marked "Switched Live"
- NOTE: If there is no switch live feed and the unit has a microwave sensor, simply bridge across from the "Permanent Live" to the Switch Live" on the mains terminal block.**
5. There should be a loose flying lead connected to the battery. This needs to be attached to the flying lead from the emergency control unit.
 6. Following power up the green LED indicator should illuminate to indicate charging. If power to the unit is disrupted or isolated, the unit indicating green LED will switch off, triggering the emergency LEDs to illuminate.
 7. Please allow 24 hours charge before first emergency test.

EMERGENCY FITTINGS ONLY. EARTH CONNECTION REQUIRED.

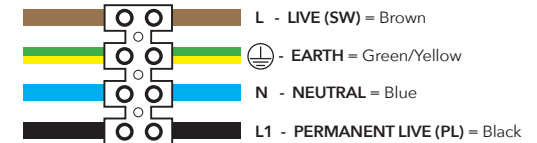

This product contains a light source of energy efficiency Class E.

Technical Helpline: +44 (0)1507 328031

** Please see our website for more detailed information on warranty.