Skypack™ Pro Suspension kit

Installation instructions

JCC | a **LEVITON** company

Warnings & Cautions

This kit allows for ceiling mount into concrete using wall plugs. Any damaged parts should be replaced as soon as possible. JCC will not accept responsibility for any claims arising from a sub-standard installation. These products should only be installed by a competent person with sufficient experience to install this product.

## INSTALLATION

2 Wire kit

Components

Ceiling Mount x 2

Ceiling Mount cap x 2

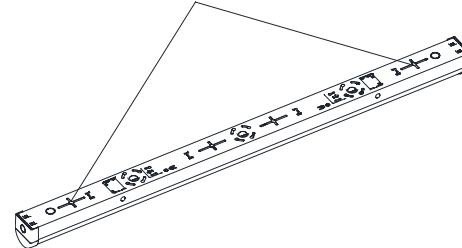1.5m Cable x 2
(Can be trimmed to suit)

Adjustable nut x 2

Flat Washer x 2

Locking nut x 2

Suspension mount points

Profile & Dimensions
All dimensions in millimetres

Ceiling Mounted Suspension

- Drill suitable mounting holes in the ceiling for the wall plugs
- Insert wall plugs and attach the ceiling mounts using screws
- Thread the the suspension cable through the hole in the ceiling mounting cap ensuring that the cable nipple is inside the cap
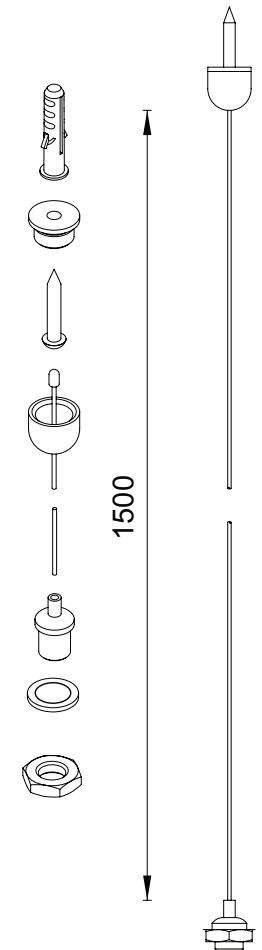- Screw the cap onto ceiling mount and ensure cable is secure

- To fit the mounting points onto the back of the body, as indicated in the illustration on the left
- Insert the adjustable cable nut into the the mounting points on the rear of the body
- Secure with the nut by placing on the thread from inside the body
- Feed the other end of the suspension cable through the nipple on the adjustable cable nut until the required height has been attained. The cable moves freely when inserted, but a locking mechanism prevents the cable from slipping out.
- Note: to remove or reverse the direction of the cable, the locking mechanism can be disengaged by pressing the nipple downwards as the cable is pulled.

The cable can be trimmed if necessary.

1500

Important warranty information

This product is supported by a 2-year standard warranty. (See website for terms and conditions).

CE UKCA RoHS Compliant **IP20 jcc.co.uk**