

# Skytile® Base Range

## Installation Instructions for Skytile® Base Suspension kit

### Warnings and cautions

- To avoid electric shock, serious injury or property damage, isolate power before installing, removing or servicing the product
- It is recommended that this product is installed by a competent person and that the installation complies with the local current wiring regulations.
- Any broken or damaged parts should be replaced as soon as possible JCC will not accept responsibility for claims arising from any sub-standard installations
- Read instructions and check that you have all of the tools and accessories required to complete the installation correctly.


## INSTALLATION

## ENGLISH

### For use with All Skytile Base Range

Use brackets as a template and secure with suitable fixings

Fig.1.

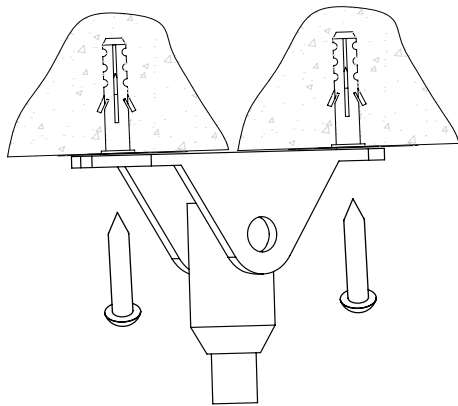


Maximum distance between brackets

Fig.2.




Fit "L" bracket to rear of panel as shown Fig.4.

Fig.3.

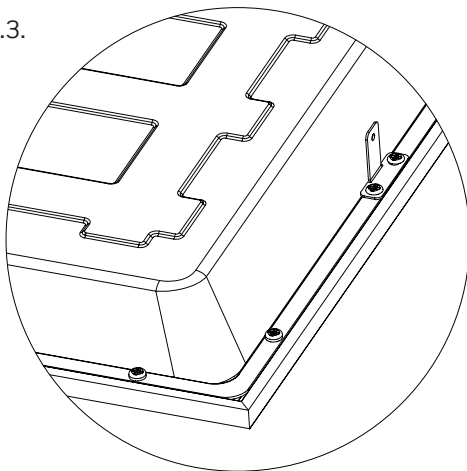

Suspension bracket fixing points


Fig.4.

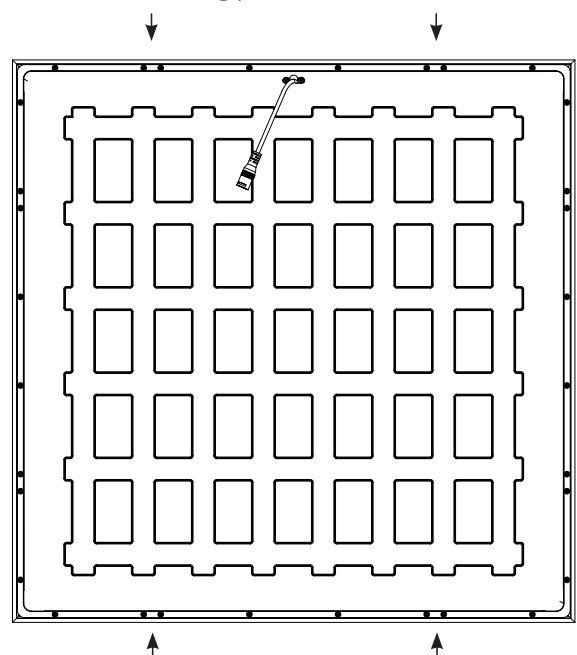

JC080050 - 4 wire Suspension kit  
JC080066 - 6 Wire suspension kit


Feed the suspension cable through the hole in the panel bracket

Fig.5.

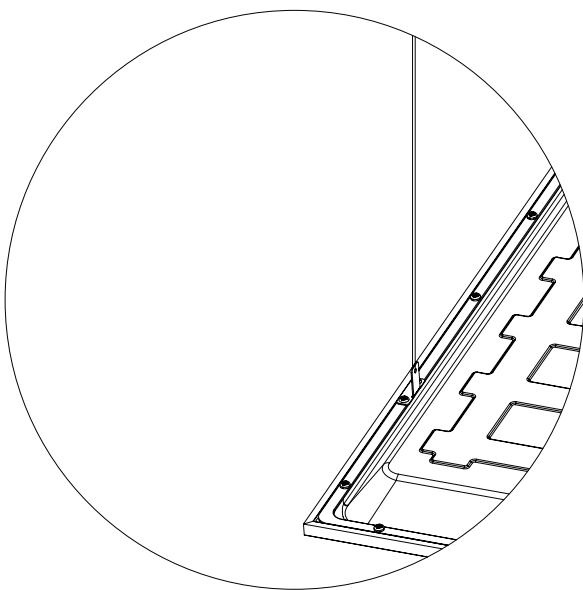

Feed the suspension cable through the hole in the bracket mounted to the ceiling



Fig.6.

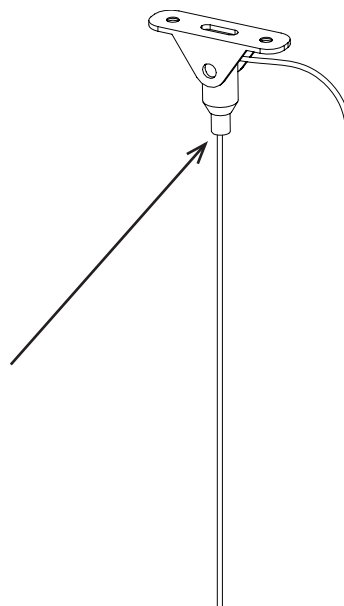

The vertical cables can be adjusted to the required height, but a locking mechanism prevents the cable from slipping out. To reverse the direction of the cable the locking mechanism can be disengaged by pressing the nipple downwards as the cable is pulled. The cable can be trimmed if necessary.

Ensure panel is suspended correctly and is level

Use spirit level

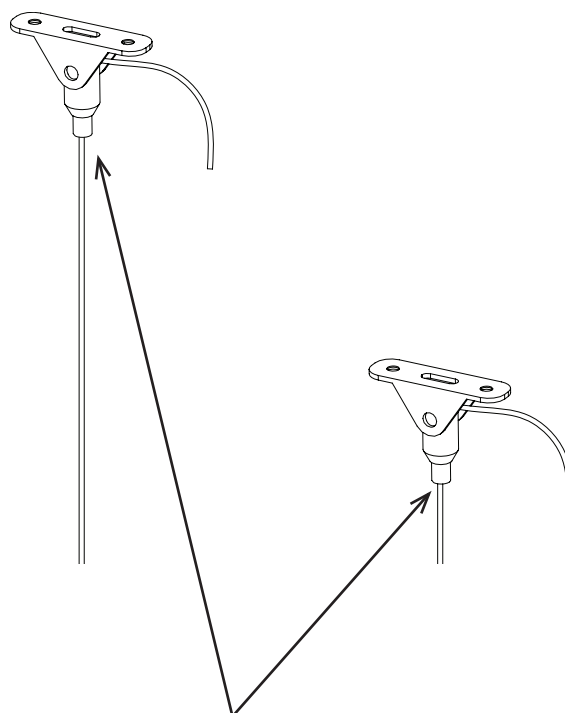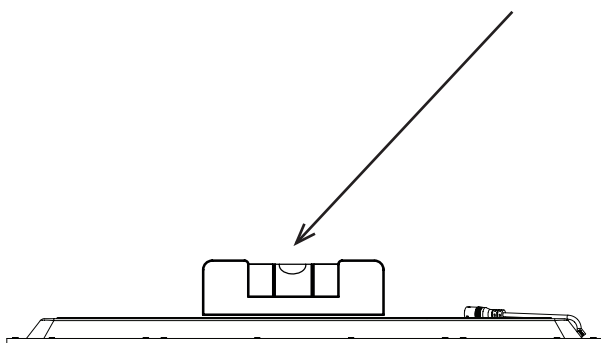

cable adjustment points