




ORPHICA SLIM

THANK YOU for buying this PHOEBE LED product. To help ensure this luminaire gives complete satisfaction please only use it according to the following instructions, and then pass the instructions to the appropriate person for retention and future reference.

This instruction sheet is relevant to Phoebe LED Orphica Slim Downlight part codes listed in the table below

WARNING

1. Installation only to be carried out by a qualified electricians
 2. Please ensure surface is suitable and capable of holding the lamp weight
 3. Do not operate if product is damaged
 4. This product is not suitable for fire rated installations
- The light source of this luminaire is not replaceable; when the light source reaches it's end of life the whole luminaire should be replaced



Product code	Power (W)	Dimensions (mm)			
		L1	L2	H	Cutout
17047	7	Ø120	Ø120	18	Ø108 - 115
17054	9	Ø150	Ø150	18	Ø135 - 145
17061	12	Ø170	Ø170	18	Ø157 - 165
17078	18	Ø220	Ø220	18	Ø206 - 225
17085	24	Ø300	Ø300	18	Ø281 - 295

**BEFORE YOU START
PLEASE READ ALL THE
INSTRUCTIONS CAREFULLY**

PRIOR TO INSTALLATION



Turn power off
at the mains

ONLY ONCE INSTALLATION IS COMPLETE




Turn power
back on at
the mains


CIRCUIT TESTING

For high voltage circuit insulation
testing disconnect mains input
supply first
(Do not circuit test using a Megger)


Required distances

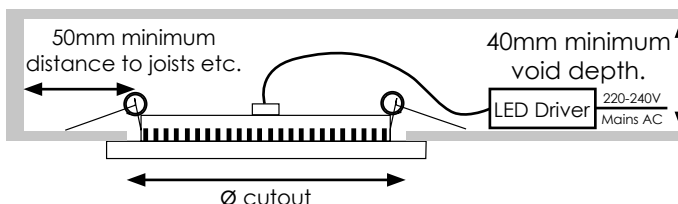


- 1 a. Ensure power is switched off.
b. Use existing recess or pre cut a new hole correct to size (see table above).




- 2 a. Connect driver to mains using the pre-wired input cable and using a suitable junction box according to current wiring regulations.




- 3 a. Connect luminaire to driver.
b. Twist clockwise to lock.
c. Place driver inside recess.

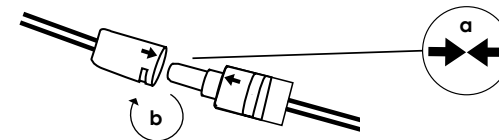

- 4 a. Set CCT switch to desired colour.



- 5 a. Push back spring clips and insert luminaire into recess.
b. Ensure luminaire is a flush fit and has plenty of ventilation, do not cover with insulating material.

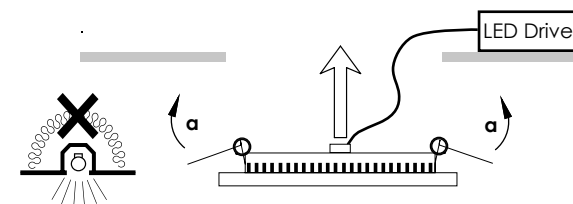

- 6 a. Turn on power at mains.



Environmental Protection

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist.
Check with your Local Authority or retailer for recycling advice.

Images are for information only. Phoebe LED shall not be held liable for improper operation of the luminaire in circumstances where procedures and specifications have not been followed correctly. Crompton Lamps Limited 2024

Tel: +44 (0)1274 657 088 Fax: +44 (0)1274 657 087 Web: www.cromptonlamps.com